



STOCKED STEEL HINGED DOORSETS

EXIT DOOR




DOOR LEAF

- Thickness of door panel – 1mm thick galvanised steel.
- Double rebated door leaf 45mm thick.
- 3 Anti jemmy bolts fitted to door leaf and frame.
- Door leaf filled with high density non-inflammable rock wool insulation.
- Reinforcements for fixing panic bolt.
- Reinforcements for door closer at the top of door leaf.
- Door leaf supplied with polythene film on both sides for protection during installation.
- Grey polyester baked paint finish. Also suitable to accept powder coat finish or on site painting.

DOOR FRAME

- Fully welded double rebated outer frame in 2mm thick galvanised steel.
- Stainless steel threshold 12mm high.
- 3 fixing points on each side with adjustable jacking points.
- Supplied complete with door leaf mounted in frame.
- Full installation kit and rubber seals supplied as standard.

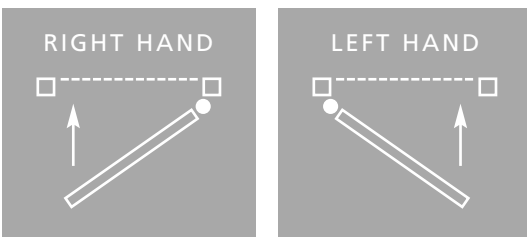

DOOR HARDWARE

- Doors supplied pre-drilled and tapped to accept all Briton latch panic hardware.
- 3 stainless steel dogbolt hinges.
- Outside locking access device and door closers supplied fitted as optional extra's.

OPTIONAL EXTRA'S

- Hardware factory fitted as required.
- Fire certified doors with up to a 4hr rating.
- Bespoke steel doors to order.
- Pre-drilled to accept Briton double panic bolt.

STANDARD SIZES

Product	DFS			
	900 (w)	2100 (h)	1000 (w)	2100 (h)
Structural Opening	900 (w)	2100 (h)	1000 (w)	2100 (h)
Frame Size	890 (w)	2090 (h)	990 (w)	2090 (h)
Access Clearance at 90° excluding hardware	760 (w)	2020 (h)	860 (w)	2020 (h)

DOOR PARTS

PERSONNEL DOOR
LOCKING SYSTEM



ANTI-JEMMY
DOG BOLTS



ADJUSTABLE
FIXING POINTS



BUTT HINGE



STAINLESS STEEL
THRESHOLD



INSTALLATION KIT

PERSONNEL DOOR

DOOR LEAF



- Thickness of door panel – 1mm thick galvanised steel.
- Double rebated door leaf 45mm thick.
- 3 Anti jemmy bolts fitted to door leaf and frame.
- Door leaf filled with high density non-inflammable rock wool insulation.
- Door leaf supplied with polythene film on both sides for protection during installation.
- Grey polyester baked paint finish. Also suitable to accept alternative on site painting.

DOOR FRAME

- Fully welded double rebated outer frame in 2mm thick galvanised steel.
- 3 fixing points on each side with adjustable jacking points.
- Stainless steel threshold 12mm high.
- Supplied complete with door leaf mounted in frame.
- Full installation kit and rubber seals supplied as standard.

DOOR HARDWARE


- 12 Point multi locking system.
- 3 stainless steel dogbolt hinges.
- Stainless steel “D” handles and internal thumbscrew with euro lock cylinder.
- 5 keys keyed alike (unlimited keys keyed alike available)

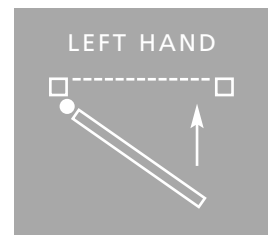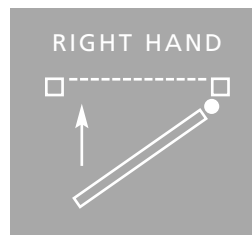

STANDARD SIZES

Product	DPS			
	900 (w)	2100 (h)	1000 (w)	2100 (h)
Structural Opening	900 (w)	2100 (h)	1000 (w)	2100 (h)
Frame Size	890 (w)	2090 (h)	990 (w)	2090 (h)
Access Clearance at 90° excluding hardware	760 (w)	2020 (h)	860 (w)	2020 (h)

TECHNICAL SPECIFICATION

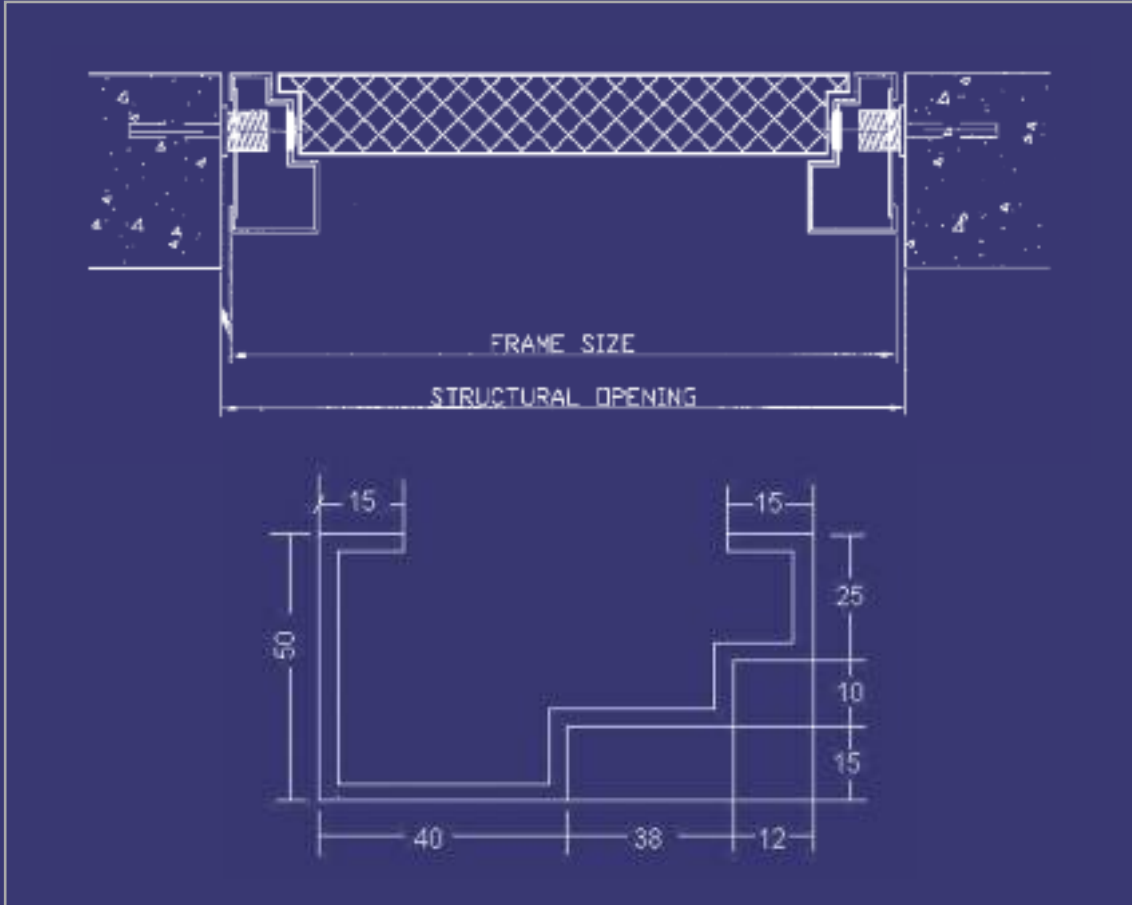



Brook Street Nelson Lancashire BB9 9PU

T: 01282 615239 F: 01282 698509

E: sales@nvmdoors.co.uk

W: www.nvmdoors.co.uk

