

STEEL DOORSETS SERIES 3



FIRE ESCAPE DOORS

- | | |
|---------------|---|
| DFS305 | Fire Escape Door - L/H 890 x 2090 Single Push Bar |
| DFS306 | Fire Escape Door - R/H 890 x 2090 Single Push Bar |
| DFS307 | Fire Escape Door - L/H 990 x 2090 Single Push Bar |
| DFS308 | Fire Escape Door - R/H 990 x 2090 Single Push Bar |
| DFS321 | Fire Escape Door - L/H 890 x 2090 Double Panic Bar |
| DFS322 | Fire Escape Door - R/H 890 x 2090 Double Panic Bar |
| DFS323 | Fire Escape Door - L/H 990 x 2090 Double Panic Bar |
| DFS324 | Fire Escape Door - R/H 990 x 2090 Double Panic Bar |
| DFS331 | Fire Escape Door - L/H 890 x 2090 Single Push Bar O/O Device |
| DFS332 | Fire Escape Door - R/H 890 x 2090 Single Push Bar O/O Device |
| DFS333 | Fire Escape Door - L/H 990 x 2090 Single Push Bar O/O Device |
| DFS334 | Fire Escape Door - R/H 990 x 2090 Single Push Bar O/O Device |
| DFS341 | Fire Escape Door - L/H 890 x 2090 Double Panic Bar O/O Device |
| DFS342 | Fire Escape Door - R/H 890 x 2090 Double Panic Bar O/O Device |
| DFS343 | Fire Escape Door - L/H 990 x 2090 Double Panic Bar O/O Device |
| DFS344 | Fire Escape Door - R/H 990 x 2090 Double Panic Bar O/O Device |



PERSONNEL DOORS

- | | |
|---------------|--|
| DPS311 | Personnel Door Kit - 12 Point L/H 890 x 2090 |
| DPS312 | Personnel Door Kit - 12 Point R/H 890 x 2090 |
| DPS313 | Personnel Door Kit - 12 Point L/H 990 x 2090 |
| DPS314 | Personnel Door Kit - 12 Point R/H 990 x 2090 |

STEEL DOORSET ACCESSORIES



DHA001 STEEL DOOR
ACCESSORY PACK



DHC002 RYOBI DOOR
CLOSER



DHL002 OUTSIDE ACCESS
DEVICE



DHL003 DOUBLE PANIC BOLT
SINGLE DOOR TYPE
(BRITON 376 OEM/SE)



DHL004 SINGLE PANIC LATCH
(BRITON 378 OEM/R/SE)



DHL005 PUSH PAD LATCH



DHL017 PANIC BOLT
SINGLE DOOR EXIDOR 294
(0210073701)



DHL019 DOOR OPENING
RESTRICTOR



DHL020 DOUBLE EURO
CYLINDER NICKEL 70MM



DHL021 EURO CYLINDER
KEYED & THUMB TURN



DHL030 OUTSIDE ACCESS DEVICE
COMPLETE WITH HANDLE

- Suitable for L.H & R.H Doors
- Durable Powder Coated (Silver) Standard Finish.
- Bolt Through Fixings for Security.
- Supplied with Euro Cylinder, Standard Differs, 3-Keyed (or without cylinder).
- Optional Cylinders Produced Keyed Alike or Master Key System.
- Suitable for Door Thickness Not Exceeding 70mm.
- Coloured and Plated Finishes Available.
- For Use With All Panic Bolts and Push Pad Exit Devices.



DHL031 HEAVY DUTY PANIC BAR CODELOCK

- Heavy Duty Codelock.
- PVD Weather Resistant, Low Maintenance Finish.
- Full Size Lever Handles.
- Outside Lever has slipping clutch to avoid damage to the mechanism if forced.
- Easy Code Change as Often as Required.
- Code Free Option Available.
- Coded Front Plate with Extra Long Spindle to work with most single point panic pads or bars.



DHL032 WALL MOUNTED MAGNETIC DOOR HOLDER

The DHL032 door holder is a fail safe unit energized by a power supply installed on a large scale building, between fire escape doors. It releases the armature plate allowing the door closer to close the door when the prevention system detects a fire alarm or emergency. The electromagnetic door holder are constructed with a PUSH OFF button on magnet for instant release, the door can open or close manually at any time.

SERIES 3 FIRE EXIT STOCK DOOR SPECIFICATION

Leaf: Overall Thickness: 45mm
Material: 1.0 Zintec
Core Infill: Rockwool

Door Leaf Construction (Rockwool): Manufactured from 1.0 zintec steel, double skinned with interlocking seams reinforced vertically with interlocking channels. Reinforced headplate, footplate and centre-plate for furniture fixing.
Spaces are filled with Rockwool core.

Frame: Frame Depth: 90mm x 50mm Double Rebate
Material: 2.0mm

Description: Manufactured from 2.0mm zintec formed to double rebated profile fully welded form, reinforced and fitted with fixing plates and anti jemmy devices. Jacking Screws fitted as standard.

Threshold: H TYPE Stainless Steel (Fully Welded)

Overall Maximum Frame Size: Single Door: 890mmW x 2095mmH and 990mmW x 2095mmH


Finish: Factory Finish Polyester, Powder Coated in Grey. (Can be over Coated)

Ironmongery: Pre-drilled to suit Briton 378 Single Panic Latch (Supplied)
Briton 376 Double Panic Bolt (Optional Extra)

Hinges: Stainless steel ball bearing butt hinges
Stainless steel dog bolt

Fire Rating: NIL

Certification: TBA

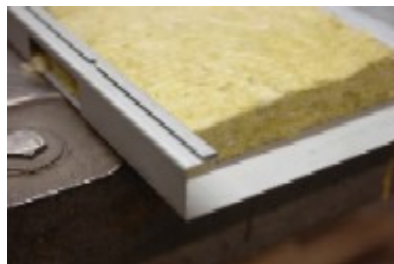

Internal Core

SERIES 3 PERSONNEL STOCK DOOR SPECIFICATION

Leaf: Overall Thickness: 45mm
Material: 1.0 Zintec
Core Infill: Rockwool

Door Leaf Construction (Rockwool): Manufactured from 1.0 zintec steel, double skinned with interlocking seams reinforced vertically with interlocking channels. Spaces are filled with Rockwool core.

Frame: Frame Depth: 90mm x 50mm Double Rebate
Material: 2.0mm

Description: Manufactured from 2.0mm zintec formed to double rebated profile fully welded form, reinforced and fitted with fixing plates and anti jemmy devices. Jacking Screws fitted as standard.

Threshold: H TYPE Stainless Steel (Fully Welded)

Overall Maximum Frame Sizes: Single Door: 890mmW x 2095mmH and 990mmW x 2095mmH


Finish: Factory Finish Polyester, Powder Coated in Grey. (Can be over Coated).

Ironmongery: 12 Point Sash lock set c/w Stainless Steel D Handles, Double Europrofile Cylinder and separate Thumb Turn.

Hinges: Stainless steel ball bearing butt hinges
Stainless steel dog bolt

Fire Rating: NIL

Certification: TBA

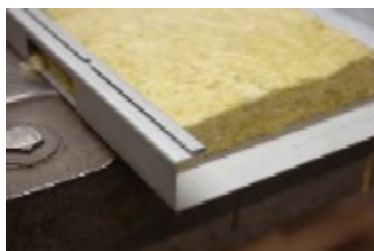

Internal Core