




230V/50Hz		Rated torque (Nm)	Rated speed (rpm)	Tube diameter (mm)	Rated voltage (V)	Rated frequency (Hz)	Rated power input (W)	Rated current (A)	Running time (min)	Protection index (IP)	Max number of turns	Total length L1/L2 (mm)
NT45 Manual	NT4550	50	12	45	230	50	300	1.35	≥4	IP44	25	675/550

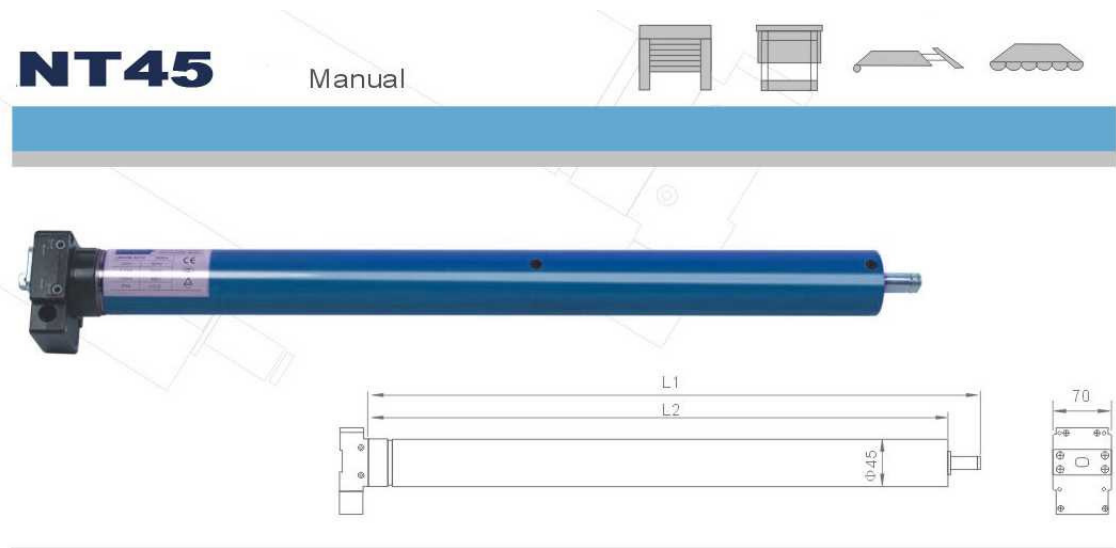